

Configurare Digital Sending HP LaserJet 9000mfp (Nr. Produs: Q2622A)

Pentru configurarea optiunii "Send to e-mail" pentru multifunctionala **HP LaserJet 9000mfp** , aveti nevoie :

1. Sa stiti in primul rand Adresa IP (Internet Protocol) a serverului SMTP (Simple Mail Transfer Protocol) din retea sau din afara retelei;
2. De un server de e-mail local care va face legatura dintre multifunctionala si casuta de e-mail (interna sau externa) ;
3. Cel putin o casuta de e-mail valida.

Optional, pentru cei care folosesc o versiune de Windows Server, puteti avea acces la serverul de LDAP (Lightweight Directory Access Protocol) . Serverele de LDAP memoreaza adresele de e-mail si numele, facand o asociere intre acestea, de tipul Nume(Ion Popescu) , E-mail (ipopescu@yahoo.com).


Nota: (Daca nu cunoasteti adresa de IP sau serverul de LDAP din retea din care faceti parte, va trebui sa intrebati administratorul de retea)

Pe Cd-ul primit din partea Ecocart Holding SRL, veti putea gasi un kit de instalare pentru hMailServer Administrator(un software gratuit), cu ajutorul caruia veti putea configura un server de e-mail pe retea din care faceti parte.


Mai jos aveti un exemplu de configurare a optiunii "Send to e-mail" ;

Dupa instalarea multifunctionalei **HP LaserJet 9000mfp** , verificati adresa IP care i-a fost alocata .


1. Mergeti in Start->Devices and Printers ;

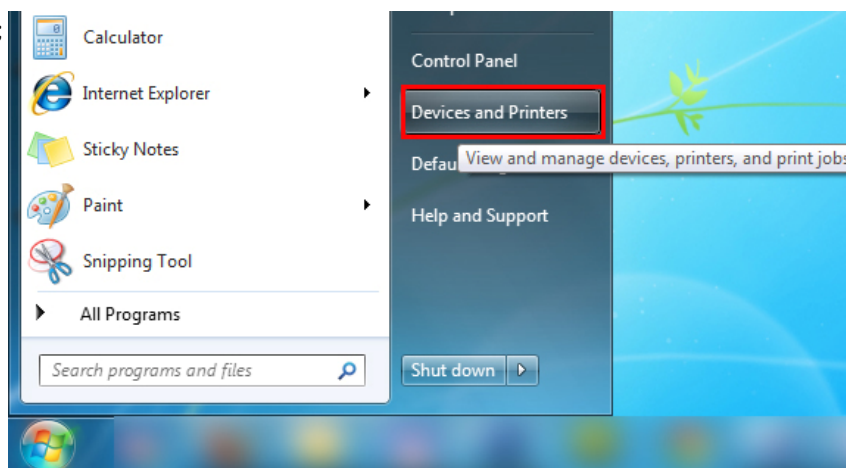


2. Click dreapta pe multifunctionala
Si selectati Printer Properties;

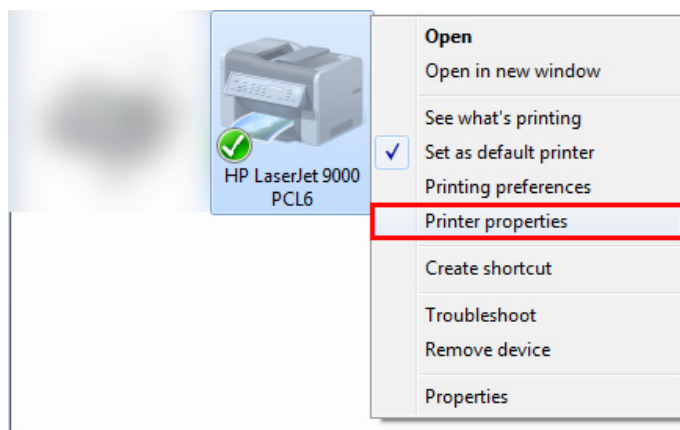


3. Mergeti la tab-ul Ports si apasati
configure;

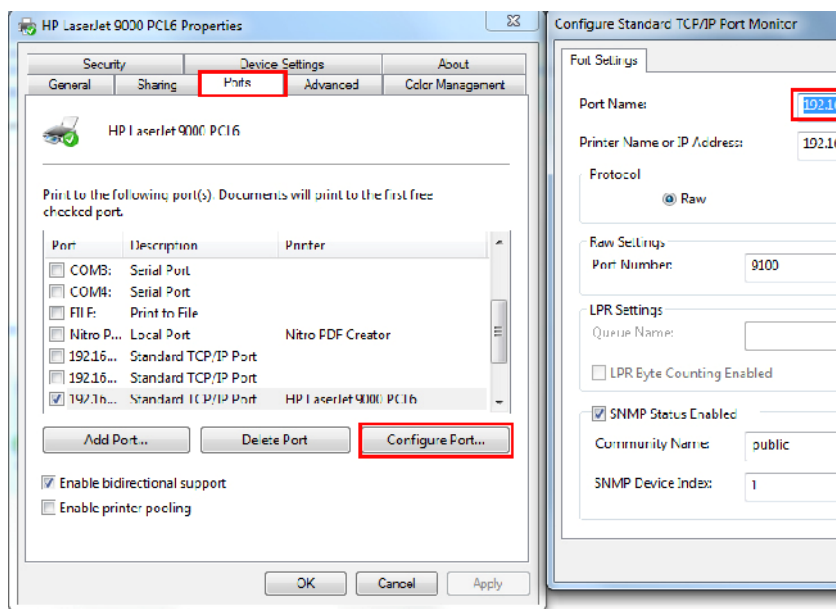

4. Deschideti browser-ul de internet si accesati adresa de IP a imprimantei :

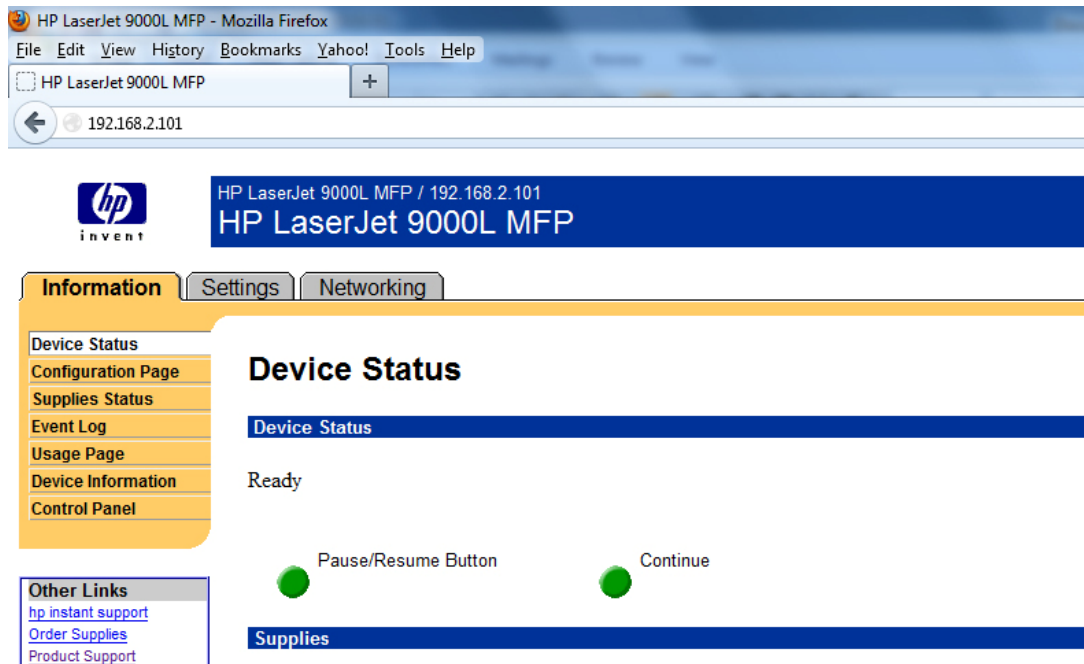


5. Mergeti la Settings-> Configure Device->Configure device->Sending->E-mail

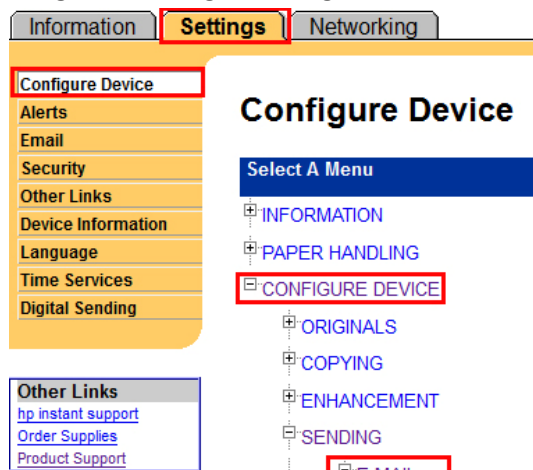


6. In casuta de SMTP Gateway, introduceti IP-ul serverului de SMTP(In cazul nostru DNS-ul serverului itok.ro, iar apoi Apply:

E-MAIL	
SCAN PREFERENCE	COLOR
FILE TYPE	PDF
ADDRESS VALIDATION	OFF
SMTP GATEWAY	92.114.87.106
LDAP GATEWAY	
FIND SMTP TIMEOUT	5 (5 - 75)
FIND LDAP TIMEOUT	5 (5 - 75)
FIND SEND GATEWAYS	<input type="checkbox"/>
TEST SEND GATEWAYS	<input type="checkbox"/>
Cancel	Apply


7. Instalati hMailServer Administrator, iar apoi deschideti aplicatia.
8. Adaugati un nou Domeniu:

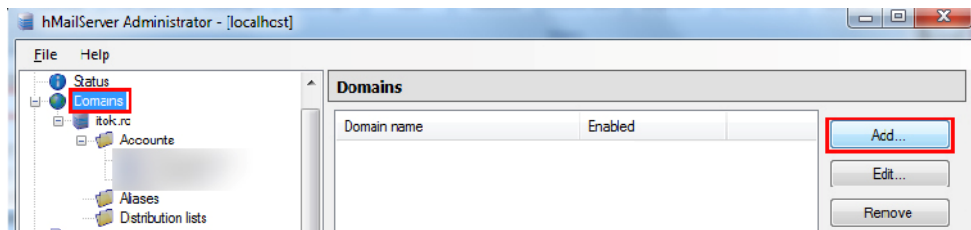


9. Scrieti adresa serverului unde sunt configurate adresele de e-mail, iar apoi apasati Save in dreapta jos:

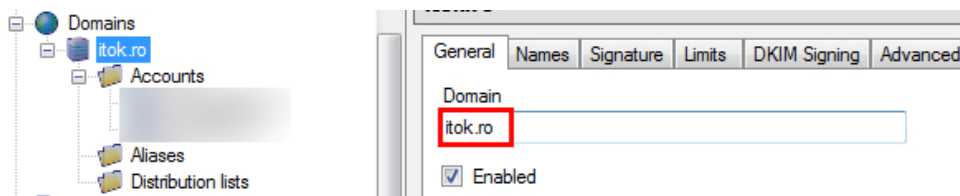


10. Mergeti la Accounts, iar apoi adaugati 2 conturi, unul de pe care imprimanta sa trimita fisierele scanate, iar altul pe care sa le primiti:

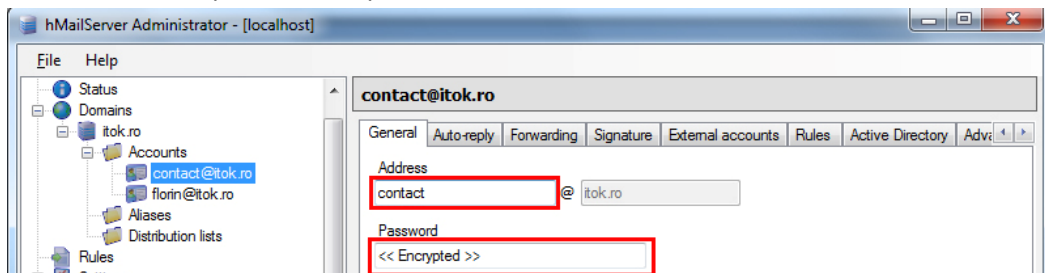


11. Mergeti la Settings->Protocols->SMTP->Routes , si adaugati una noua :

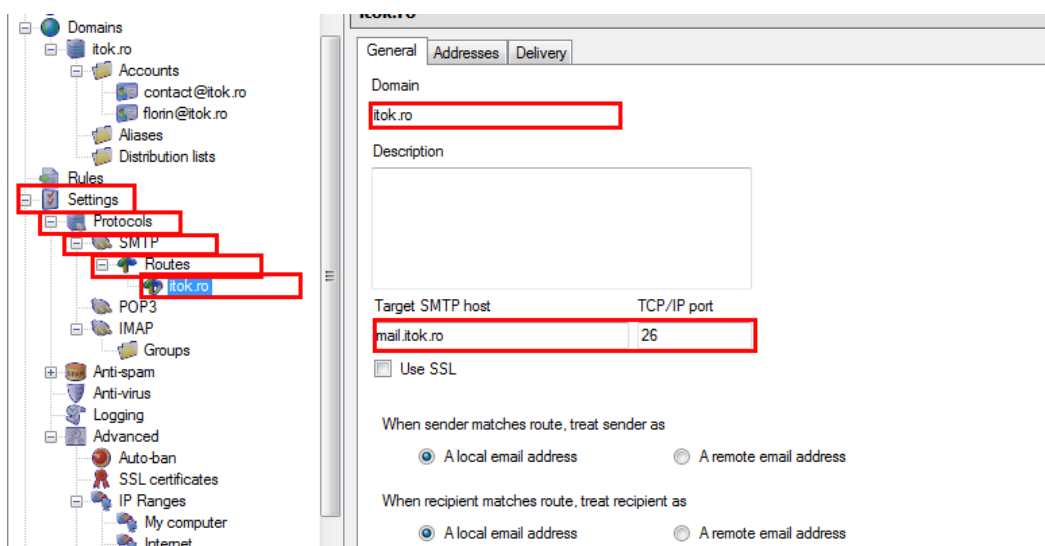

12. Mergeti in Advanced->IP Ranges-> My computer si selectati min. si max.-ul adreselor de IP pe care reseaua Dumneavoastra le poate aloca:

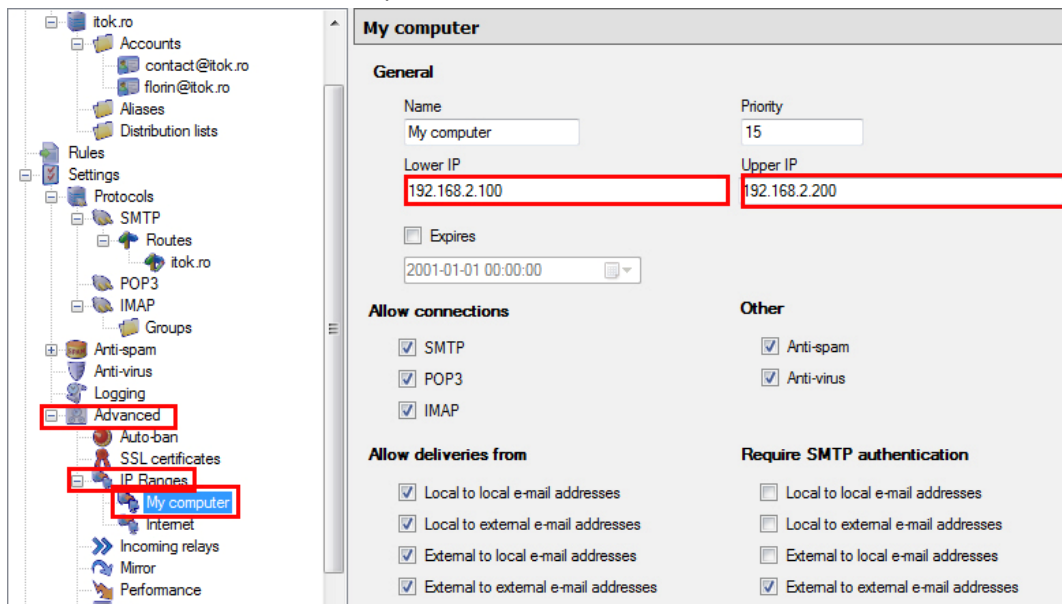

13. Deschide aplicatia Microsoft Outlook pentru a configura adresele de e-mail:
Tools->Options->Mail Setup->E-mail Accounts-> New sau Change in cazul de fata:

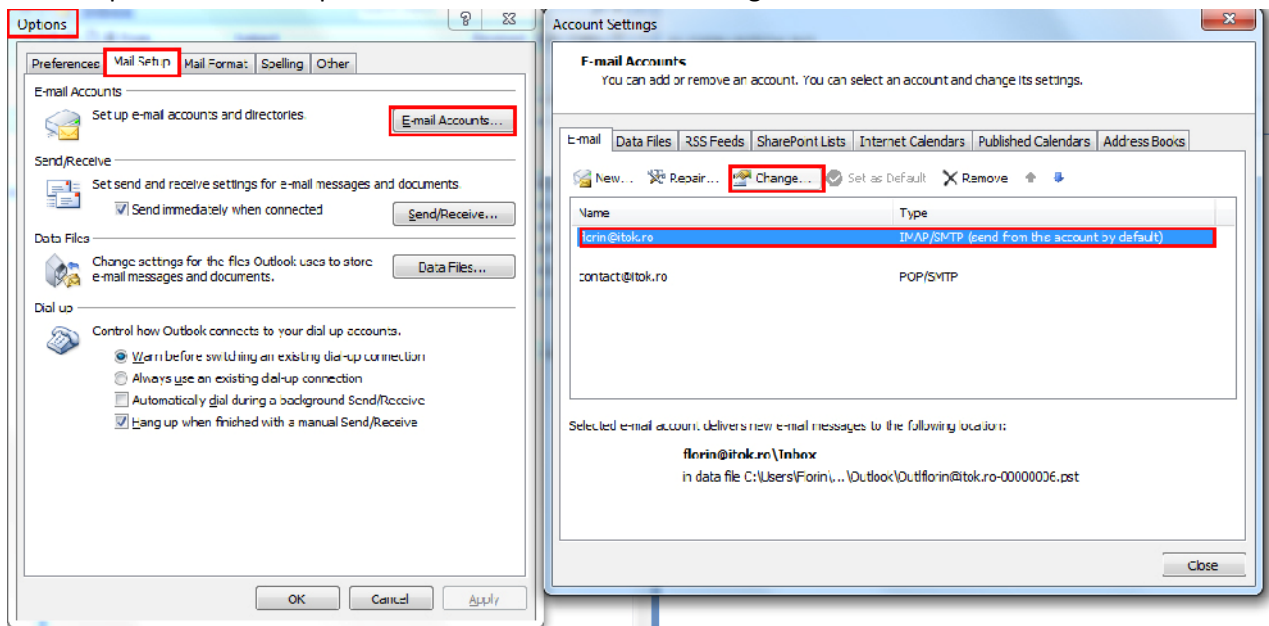

14. Completati campurile cu datele de utilizator, inclusiv Incoming mail server si Outgoing mail server, iar apoi mergeti la “More settings”

The screenshot shows the 'Change E-mail Account' dialog box with the 'Internet E-mail Settings' tab selected. The dialog contains several sections: 'User Information' with fields for 'Your Name' (ff) and 'E-mail Address' (florin@itok.ro); 'Server Information' with a dropdown for 'Account Type' (IMAP) and text boxes for 'Incoming mail server' (mail.itok.ro) and 'Outgoing mail server (SMTP)' (mail.itok.ro); 'Logon Information' with fields for 'User Name' (florin@itok.ro) and 'Password' (masked with asterisks), and a checked 'Remember password' checkbox. There is also an unchecked checkbox for 'Require logon using Secure Password Authentication (SPA)'. On the right, the 'Test Account Settings' section includes a text box with instructions and a 'Test Account Settings ...' button. At the bottom right, the 'More Settings ...' button is highlighted with a red rectangle. Navigation buttons '< Back', 'Next >', and 'Cancel' are at the bottom.

15. La sectiunea More Settings, mergeti la tab-ul Advanced, si modificati daca este cazul portul de IMAP si cel de SMTP:

The screenshot shows the 'Internet E-mail Settings' dialog box with the 'Advanced' tab selected. The 'Server Port Numbers' section has 'Incoming server (IMAP):' set to 143 (highlighted with a red rectangle) and 'Outgoing server (SMTP):' set to 25 (highlighted with a red rectangle). Both have 'Use Defaults' buttons and 'Use the following type of encrypted connection:' dropdowns set to 'None'. The 'Server Timeouts' section shows 'Short' and 'Long' (1 minute) settings. The 'Folders' section has a 'Root folder path:' text box. 'OK' and 'Cancel' buttons are at the bottom.

16. Faceti acelasi lucru pentru ambele casute de e-mail, apoi testati optiunea de “Send e-mail” din multifunctionala, completand doar casutele de “Send” si “To” . Verificati apoi casuta postala .